



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P59IS347L

- Line Voltage: 347 50/60Hz
- Instant Start
- Parallel Lamp Operation
- Active Power Factor Correction

Lamp Type	Line Volt.	Num. Of Lamps	Rated Lamp Watts	Min. Start Temp. (F/C)	Input Current (Amps)	Input Power (Watts)	MAX. THD%	Power Factor	Ballast Factor	MAX. Lamp Current Crest Factor	B.E.F.
F96T8	347	2	59	32/0	0.286	98	10	0.98	0.77	1.70	0.79
F98T8	347	1	59	32/0	0.178	61	10	0.98	0.80	1.70	1.31

The above lamps must have recessed double-contact bases

Application and Performance Specification Information Subject to Change without Notification.

Performance:

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non-Consumer limits

Safety:



- No PCB's, Type HL
- UL&cUL listed (Class P, Type 1 Outdoor)
- Output voltage: 1000V
- Voltage to ground: 600V

Application:

- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum Case Temperature: 194°F, 90°C

Physical Parameters:

- Length: 9.5" Width: 1.3" Height: 1.1"
- Weight: 1.1 lbs
- Lead Length: White, Black 25" (±1")
- Red 79" (±1")
- Blue 46" (±1")
- Mounting: 8.9"

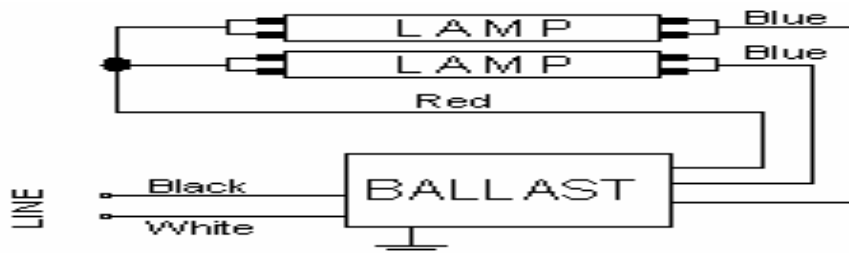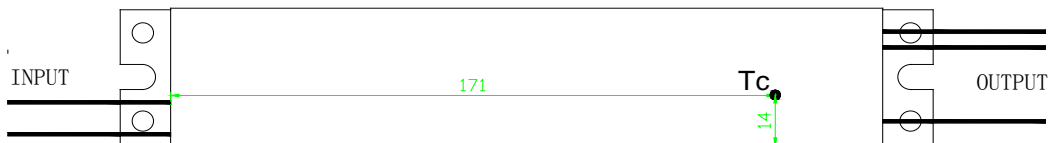

Note: For one lamp application, cap any blue lead. Insulate to 600volts.