



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P32IS347H

- Line Voltage:347V 50/60Hz
- Instant Start
- Parallel Lamp Operation
- Active Power Factor Correction

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
* F32T8	2	32	0/-18	347	0.222	74	10	0.98	1.70	1.18	1.59
FB32T8	2	32	0/-18	347	0.227	74	10	0.98	1.70	1.18	1.59
FB31T8	2	31	0/-18	347	0.217	73	10	0.98	1.70	1.18	1.62
FB28T8	2	28	0/-18	347	0.192	65	10	0.98	1.70	1.18	1.81
F32T8/ES/30	2	30	60/16	347	0.210	71	10	0.98	1.70	1.18	1.65
F32T8/ES/28	2	28	60/16	347	0.193	66	10	0.98	1.70	1.18	1.78
F32T8/ES/25	2	25	60/16	347	0.185	62	10	0.97	1.70	1.18	1.91
F25T8	2	25	0/-18	347	0.172	58	10	0.97	1.70	1.19	2.05
F17T8	2	17	0/-18	347	0.128	43	10	0.97	1.70	1.22	2.83
F32T8	1	32	0/-18	347	0.141	47	10	0.97	1.70	1.37	2.91
FB32T8	1	32	0/-18	347	0.142	48	10	0.97	1.70	1.37	2.91
FB31T8	1	31	0/-18	347	0.134	45	10	0.97	1.70	1.37	3.04
FB28T8	1	28	0/-18	347	0.123	41	10	0.97	1.70	1.37	3.34
F32T8/ES/30	1	30	60/16	347	0.132	44	10	0.97	1.70	1.37	3.11
F32T8/ES/28	1	28	60/16	347	0.123	41	10	0.97	1.70	1.37	3.34
F32T8/ES/25	1	25	60/16	347	0.118	40	10	0.97	1.70	1.37	3.42
F25T8	1	25	0/-18	347	0.112	38	10	0.96	1.70	1.39	3.65

Note: The above data is tested at 60Hz.

The lamp with "*" is the main lamp.

Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non-Consumer limits

Safety

- No PCB's, Type HL
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 600V

Application

- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum case temperature Tc: 194°F, 90°C

Physical Parameters



Length	9.5"
Width	1.3"
Height	1.1"
Mounting	8.9"
Weight	1.10 lbs

Lead Length

White, Black	25"(±1")
Red	46"(±1")
Blue	31"(±1")



APPLICATION and PERFORMANCE SPECIFICATION

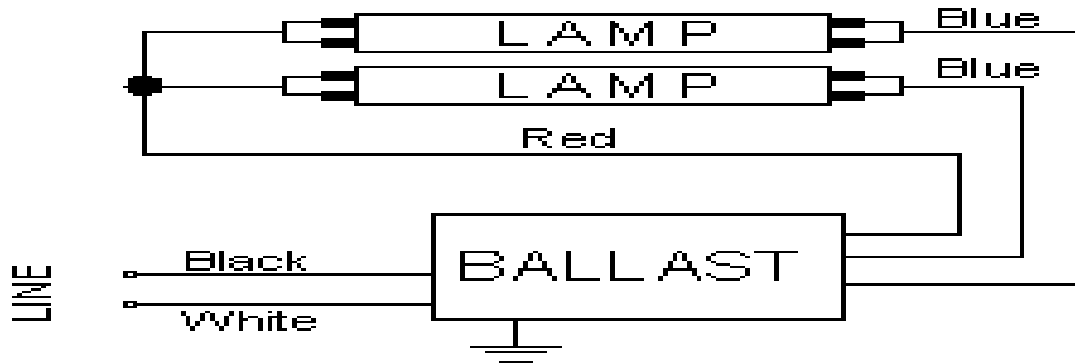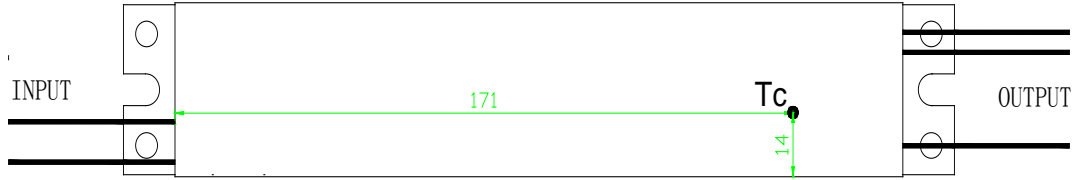

Note: For one lamp application, cap any blue lead. Insulate to 600 volts.