



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P32ISUNVEC

· Line Voltage:120-277V 50/60Hz

· Instant Start

· Parallel Lamp Operation

· Active Power Factor Correction

· Type CC

Lamp Type			Min. Start	Vin	Iin	Pin	ATHD	PF	CF	BF	BEF
Type	No.	Watts	Temp. (F/C)	(V)	(A)	(W)	≤%	≥	≤		
* F32T8	2	32	0/-18	120	0.46	56	10	0.98	1.7	0.89	1.59
FB32T8	2	32	0/-18	120	0.46	56	10	0.98	1.7	0.89	1.59
FB31T8	2	31	0/-18	120	0.44	52	10	0.98	1.7	0.89	1.71
FB28T8	2	28	0/-18	120	0.41	49	10	0.98	1.7	0.89	1.82
F32T8/ES/30	2	30	0/-18	120	0.44	51	10	0.98	1.7	0.89	1.75
F32T8/ES/28	2	28	0/-18	120	0.41	49	10	0.98	1.7	0.89	1.82
F32T8/ES/25	2	25	0/-18	120	0.39	46	10	0.98	1.7	0.89	1.93
F25T8	2	25	0/-18	120	0.36	42	10	0.98	1.7	0.89	2.12
F17T8	2	17	0/-18	120	0.25	28	10	0.98	1.7	0.91	3.25
F40T8	1	40	32/0	120	0.35	44	10	0.98	1.7	1.00	2.27
F32T8	1	32	0/-18	120	0.29	35	10	0.98	1.7	1.08	3.09
FB32T8	1	32	0/-18	120	0.29	35	10	0.98	1.7	1.08	3.09
FB31T8	1	31	0/-18	120	0.28	32	10	0.98	1.7	1.08	3.37
FB28T8	1	28	0/-18	120	0.25	30	10	0.98	1.7	1.08	3.60
F32T8/ES/30	1	30	0/-18	120	0.27	31	10	0.98	1.7	1.08	3.48
F32T8/ES/28	1	28	0/-18	120	0.25	30	10	0.98	1.7	1.08	3.60
F32T8/ES/25	1	25	0/-18	120	0.24	29	10	0.98	1.7	1.08	3.72
F25T8	1	25	0/-18	120	0.23	26	10	0.98	1.7	1.08	4.15
F17T8	1	17	0/-18	120	0.16	21	10	0.98	1.7	1.10	5.24
* F32T8	2	32	0/-18	277	0.20	55	10	0.97	1.7	0.89	1.60
FB32T8	2	32	0/-18	277	0.20	55	15	0.97	1.7	0.89	1.60
FB31T8	2	31	0/-18	277	0.19	51	15	0.97	1.7	0.89	1.75
FB28T8	2	28	0/-18	277	0.18	47	15	0.97	1.7	0.89	1.89
F32T8/ES/30	2	30	0/-18	277	0.19	51	15	0.97	1.7	0.89	1.75
F32T8/ES/28	2	28	0/-18	277	0.18	47	15	0.97	1.7	0.89	1.89
F32T8/ES/25	2	25	0/-18	277	0.17	45	15	0.97	1.7	0.89	1.98
F25T8	2	25	0/-18	277	0.16	41	15	0.97	1.7	0.89	2.17
F17T8	2	17	0/-18	277	0.11	28	15	0.97	1.7	0.91	3.25
F40T8	1	40	32/0	277	0.16	43	15	0.97	1.7	1.00	2.33
F32T8	1	32	0/-18	277	0.13	34	15	0.97	1.7	1.08	3.18
FB32T8	1	32	0/-18	277	0.13	34	15	0.97	1.7	1.08	3.18
FB31T8	1	31	0/-18	277	0.13	31	15	0.97	1.7	1.08	3.48
FB28T8	1	28	0/-18	277	0.11	29	15	0.97	1.7	1.08	3.72
F32T8/ES/30	1	30	0/-18	277	0.12	30	15	0.97	1.7	1.08	3.60
F32T8/ES/28	1	28	0/-18	277	0.11	29	15	0.97	1.7	1.08	3.72
F32T8/ES/25	1	25	0/-18	277	0.11	29	15	0.97	1.7	1.08	3.72
F25T8	1	25	0/-18	277	0.10	26	15	0.96	1.7	1.08	4.15
F17T8	1	17	0/-18	277	0.09	21	15	0.95	1.7	1.10	5.24

Note: The above data is tested at 60Hz.

The lamp with "*" is the main lamp.



APPLICATION and PERFORMANCE SPECIFICATION

The ballast BLE can meet DOE energy conservation standards with main lamp. The energy standards velum is 0.90.

Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Consumer limits(120V)
- Meets FCC 18 Non-Consumer limits(277V)
- Meets DOE energy conservation standards

Safety

- No PCB's, Type HL
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 600V

Application


- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum case temperature Tc: 194°F, 90°C

Physical Parameters

Length	9.5"
Width	1.3"
Height	1.1"
Mounting	8.9"
Weight	1 lbs

Lead Length

White, Black	25"(±1")
Red	46"(±1")
Blue	31"(±1")

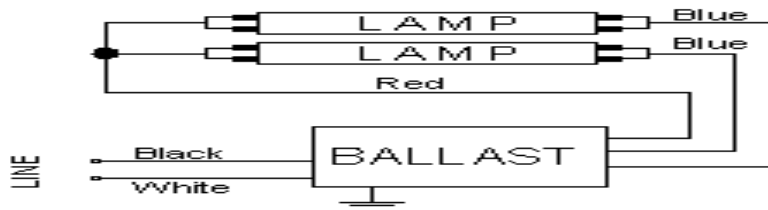

Note: For one lamp application, cap any blue lead. Insulate to 600 volts.