

# APPLICATION and PERFORMANCE SPECIFICATION

## ACT1P400PSUNVH

· Line Voltage:120-277V 50/60Hz

· Program Start

· Lamp End of Life Protection

· Active Power Factor Correction

Lamp Type			Min. Start	Vin	Iin	Pin	ATHD	PF	CF	Lamp
Type	No.	Power	Temp.	(V)	(A)	(W)	≤%	≥	≤	Current (A)
	1	50-92	-20/-29	277	0.22-0.38	60-103	10	0.98	1.70	0.38-0.45

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

### Performance

Meets ANSI Standard C82.11-2002

Meets ANSI Standard C62.41-2002

Meets FCC 18 Non-CONSUMER Limits

### Safety

No PCB's, Type HL

UL listed (Class P, Type 1 Outdoor)

OCV : 300V

### Application

Maximum Ambient Temperature: 131°F,55°C

Remote Mounting: 18 ft. max. Lead length, 18AWG

Sound Rated: A

Maximum case temperature Tc: 167°F,75°C

### Physical Parameters

Length 9.75" /248mm

Width 1.5" /38mm

Height 1.2" /31mm

Mounting 8.9" /226mm


Weight 1.3 lbs/589g

### Lead Length

White, Black 18"(±1")/457mm

Red/ Blue 47"(±1")/1190mm 32"(±1")/813

# APPLICATION and PERFORMANCE SPECIFICATION

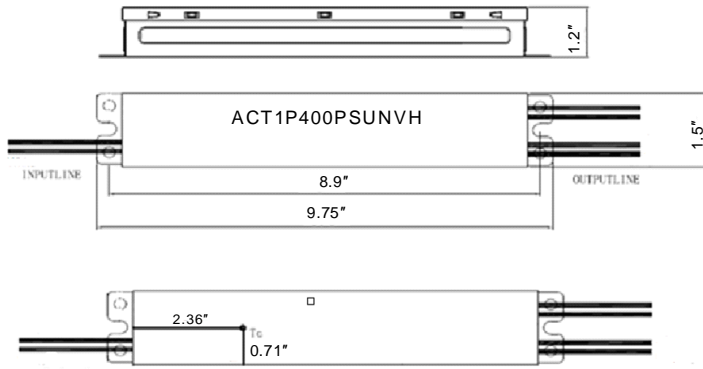

50-92W

