

APPLICATION and PERFORMANCE SPECIFICATION

ACT2S39PSUNV

- Line Voltage:120-277V 50/60Hz
- Program Start
- Lamp End of Life Protection
- Active Power Factor Correction

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	Lamp current (A)
Type	No.	Watts								
	1	30-70	0/-18	120	0.25-0.7	85	10	0.98	1.7	0.3-0.36
	2	16-32	0/-18	120	0.21-0.32	19-38	10	0.98	1.7	0.3-0.36
PLL 18	1	16	0/-18	120	0.21	19	10	0.77	1.7	0.35
PLL 18	2	16	0/-18	120	0.32	38	10	0.98	1.7	0.35

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

Performance

Meets ANSI Standard C82.11-2002
 Meets ANSI Standard C62.41-2002
 Meets FCC 18 Non-CONSUMER Limits
 Meets DOE energy conservation standards

Safety

No PCB's, TYPE HL
 UL listed (Class P, Type 1 Outdoor)
 OCV : 300V

Application

Maximum Ambient Temperature: 131°F,55°C
 Remote Mounting: 18 ft. max. Lead length, 18AWG
 Sound Rated: A
 Maximum case temperature Tc: 194°F,90°C


Physical Parameters

Length 9.5" (241mm)
 Width 1.3" (33mm)
 Height 1.0" (26mm)
 Mounting 8.9" (226mm)
 Weight 0.8 lbs(363g)

Lead Length

White, Black 25"(±1")(635mm)
 Red/ Blue 23"(±1")(584mm)
 Yellow 27"(±1")(686mm)

APPLICATION and PERFORMANCE SPECIFICATION

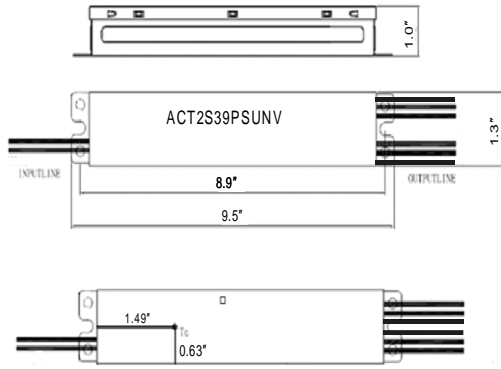

16-32W

30-70W

