



APPLICATION and PERFORMANCE SPECIFICATION

ACT2S70PSUNV

- Line Voltage:120-277V 50/60Hz
- Series Lamp Operation
- Program Start
- Active Power Factor Correction
- ..

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	Lamp current (A)
Type	No.	Watts								
	1	55-110	0/-18	277	0.235-0.465	60-118	10	0.90	1.7	0.5-0.6
	2	36-55	0/-18	277	0.32-0.465	60-118	10	0.90	1.7	0.5-0.6
PLL 55	2	55	0/-18	277	0.465	118	10	0.90	1.7	0.55
PLL 55	1	55	0/-18	277	0.235	60	10	0.90	1.7	0.55

Note: the above data is tested at 60Hz.

Application and Performance Specification Information Subject to Change without Notification.

Performance

Meets ANSI Standard C82.11-2002
 Meets ANSI Standard C62.41-2002
 Meets FCC 18 Non CONSUMER Limits

Application

Maximum Ambient Temperature: 131°F,55°C
 Remote Mounting: 6 ft. max. Lead length, 18AWG
 Sound Rated: A
 Maximum case temperature Tc: 194°F,90°C

Safety


No PCB's, Type HL
 UL & cUL listed (Class P, Type 1 Outdoor)
 OCV 300V

Physical Parameters


Length * Width * Height 9.75 " *1.6 " *1.1 "
 Mounting 8.9"
 Weight 1.10 lbs
 White, Black 25"(±1")
 Orange 20"(±1")
 Brown 20"(±1")
 Yellow 20"(±1")
 Red/ Blue 20"(±1")



APPLICATION and PERFORMANCE SPECIFICATION

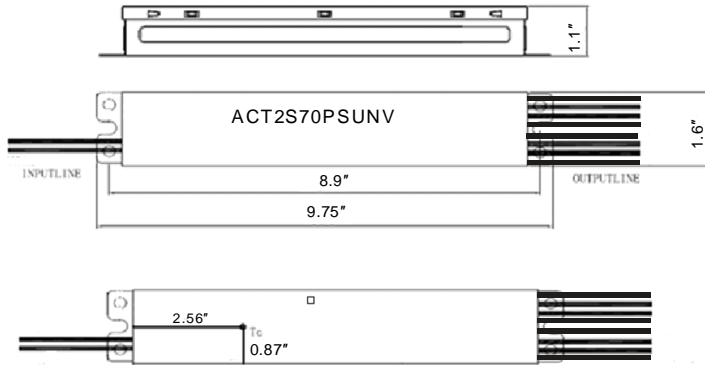

55-110W

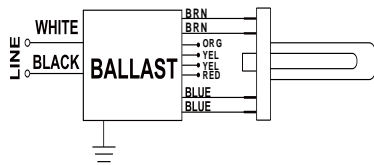

36-55W

